
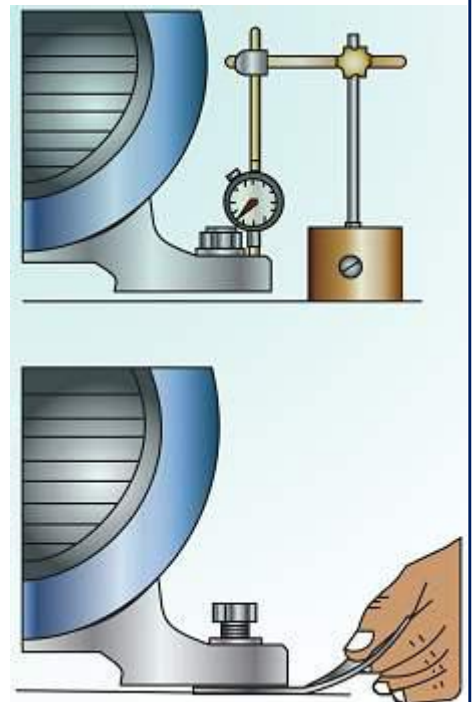



PRECUT ALIGNMENT SHIMS

Alignment shims are used in shaft alignment process to correct the vertical position of a movable machine so that it will be in alignment with the stationary or reference machine. They are designed to make parts fit more accurately, and to keep different components of a machine aligned. This reduces wear, keeps things stable, and allows a machine to function to the very best of its ability.

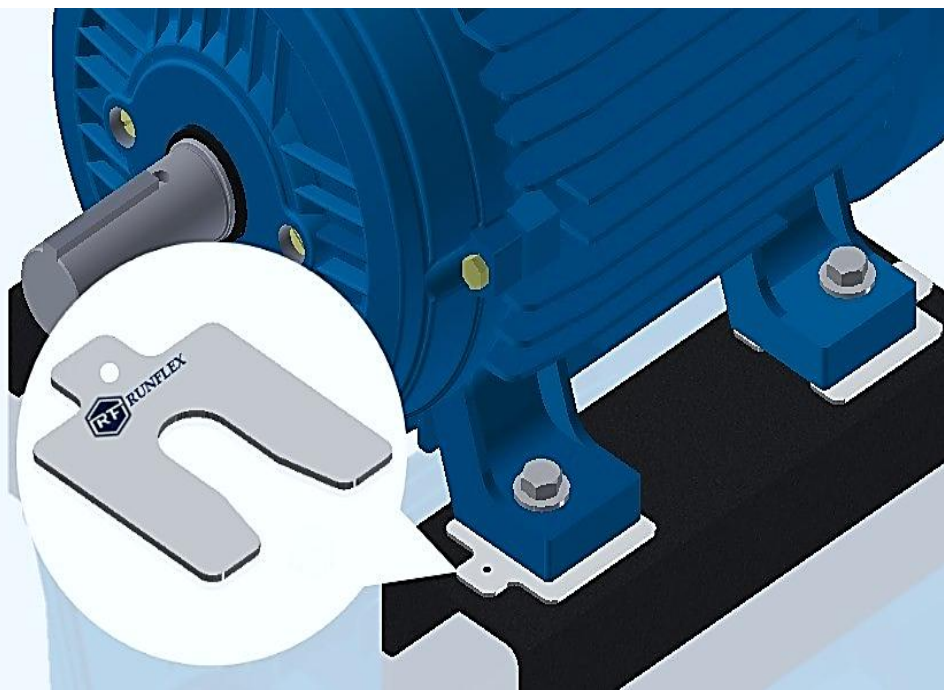


FEATURES:-

- PRECUT & BURR FREE
- ACCURATE & EVEN IN THICKNESS
- SHIM SIZES CONFORM TO STANDARD BOLT SIZES
- EASY & CONVINENT TO CARRY
- PERMANENT MARKING OF SIZE & THICKNESS ON EACH SHIM
- CORROSION RESISTANT
- SAFE TO HANDLE
- M.O.C - STAINLESS STEEL (GRADE 304)

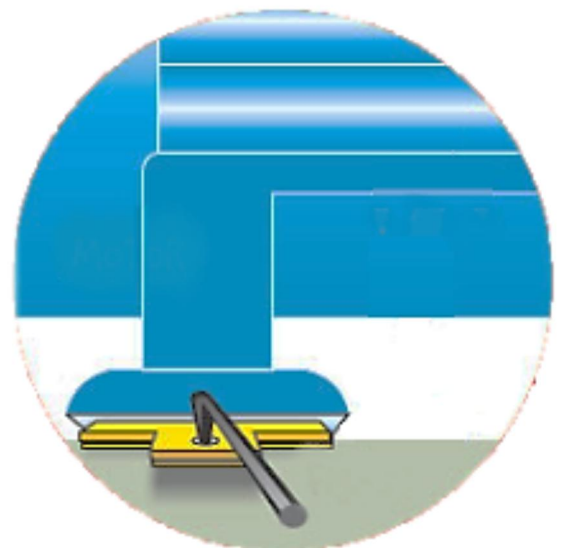

DIMENSIONAL DATA

SIZE SELECTION CHART -

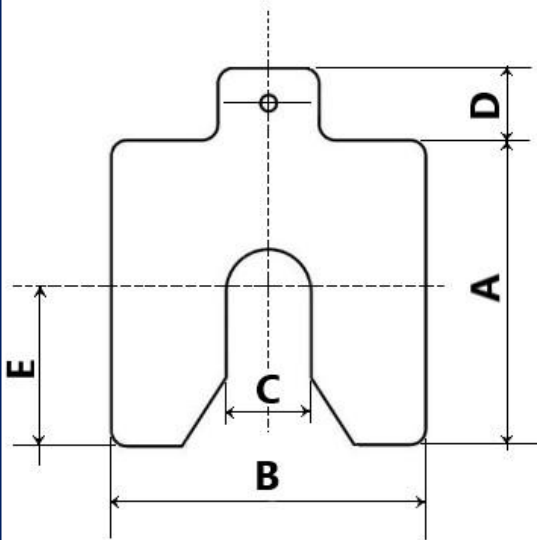

SIZE	A	B	C	D	E	THICKNESS
RF-1	40	40	13	16	20	0.05
RF-2	50	50	17	18	25	0.10
RF-3	75	75	21	18	37.5	0.20
RF-4	100	100	27	25	50	0.40
RF-5	125	125	45	30	62.5	0.50
RF-6	200	200	55	30	100	0.70
						1.00
						2.00
						3.00

ALL DIMENSIONS ARE INMM

ALIGNMENT SHIM KIT-

KIT	0.05	0.10	0.20	0.40	0.50	0.70	1.00	2.00
RF-1 TO RF-4	20	20	20	20	20	20	20	10
RF-5 & RF-6	10	10	10	10	10	10	10	10

ABOVE TABLE SHOWS QUANTITY PER THICKNESS

NOTE: ABOVE KITS ARE AVAILABLE IN WOODEN BOX WITH QUANTITY OF SHIMS AS PER TABLE ABOVE.

The contents of this publication belongs to **RUNFLEX TRANSMISSIONS PVT. LTD.** and is subject to copyright. We ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein. We reserve the right to alter or change specification without prior notice.



AUTHORISED DEALER:

OFFICE: 3/3 DEDGE INDUSTRIES, NANDED PHATA, SINHAGAD ROAD, PUNE - 411041

CONTACT: 9422089962 / 9545565527 **EMAIL:** runflex.transmissions@gmail.com

www.runflextransmissions.com